


PRESSURE TEST UNIT 520 BAR

ROV INTERVENTION
ISOLATED HYDRAULIC
PUMP SYSTEM

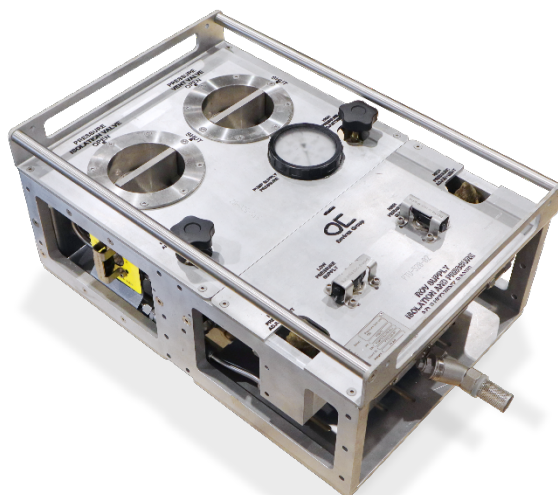

Description

Pressure Test Unit (PTU) is designed to be a compact and highly effective tool for subsea pressure testing from ROV.

The PTU comes with integrated dual action booster pump, Flow Control Valves on inlet supply for tuning- and maximum pump pressure control. PTU can be set up for low pressure test through a separate LP line or high pressure test through the HP line. Each line has a separate Safety Pressure Valves on the pressure outlet line.

Digital sensor and logging software gives live pressure feedback and recording options for pressure test certificate.

Typical Operations

- Pressure Testing
- Logging
- Printing of Test Certificate

Features

- Dual Acting booster pump 520 Bar
- Vent to sea/tank line
- HP and LP circuit
- Digital Pressure Sensor
- Print of Pressure Test Certificate
- Coms RS 232
- Compact design and low weight

SPECIFICATIONS

PRESSURE TEST UNIT 520 BAR

General Technical Specifications

Type	Pressure Test Unit
Part Number	N/A
Dimensions L x W x H	650 mm x 450 mm x 276,5 mm
Weight in air	85 kg

Hydraulic

Max Input Pressure	210 Bar
Max Output Pressure	520 Bar
Max Input Flow	80 L/min
Max Output Flow	30 L/min

Connection ROV Pressure	JIC #8
Connection ROV Return	JIC #8
Connection ROV Drain	JIC #6
Connection Output Pressure	JIC #6
Connection Suction	1" BSP

Technical

Depth Rating	MSW 3000
--------------	----------

Communication

Connector	RS232 GLENAIR 5507-1508
-----------	----------------------------

GLENAIR 5507-1508

- 1: 0V
- 2: 24VDC
- 3: CAN-H
- 4: CAN-L
- 5: RS232 Tx
- 6: RS232 Rx
- 7: RS232 Com
- 8: NC

