

ROV CHAIN HOIST 20T 16 METER

HYDRAULIC DRIVEN
20T CAPACITY
16M CHAIN



Description

The ROV hydraulic driven chain block is available for rental with 20T lifting capacity and 16 meter chain.

Chain block is fully corrosion protected with A316 framework and handle. The hydraulic motor is driven through a dual port Hotstab Type A. Chain block comes with a proven subsea brake design and patented Twin Cam shaped pawl design. A heavy-duty flexible chain bag c/w A316 mounting frame to store 16 meter of chain. Frame has a balanced design for easy handling and installation.

Features

- Hydraulic driven motor
- Hotstab 2-ports Type A
- 20 Tonne lifting capacity
- 16 meter chain
- Speed and Pressure Control
- Compact and user friendly
- Proven Subsea Design

□ The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement. Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, sales@envirent.no

SPECIFICATIONS

ROV CHAIN HOIST 20T 16 METER

General Technical Specifications

Type	ROV Chain Hoist 20T 16m
Part Number	LIFT-CH
Dimensions L x W x H	700 mm x 278 mm x 425 mm
Weight in air	~200 kg
Depth Rating	3000 MSW

Hydraulic Specifications


Max. Input Pressure	207 Bar
Max. Input Flow	8 L/min

Hydraulic Interface

Connection ROV Pressure A	JIC 6
Connection ROV Pressure B	JIC 6

Chain Grade

Grade 80
Other options are available at additional cost, contact sales@envirent.no**

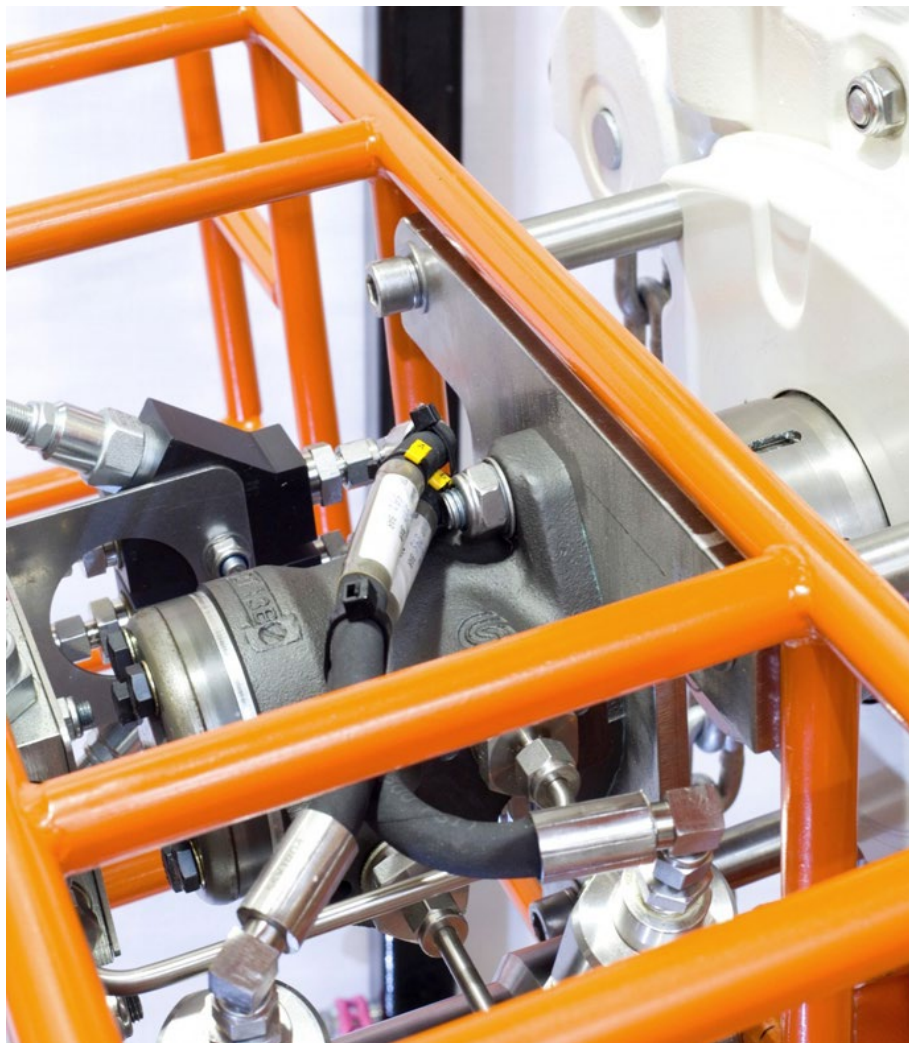

□ The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement. Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, sales@envirent.no

SPECIFICATIONS

ROV CHAIN HOIST 20T 16 METER

Inventory List:

Items listed in Inventory List are delivered with the equipment as standard. Any additional equipment must be specified upon order.

Item	Description	Total Qty	PN
1.	Receptacle Ø35 2-port (installed on Chain Hoist)	1	
2.	Hot Stab Ø35 2x Port w/CV - 10K. With Jic 6 Male	1	
3.	Hydraulic Hose 3/8" Jic 6 Fm – Fm, 4m. SS	2	
4.	Dedicated Aluminum Pallet	1	
5.			
6.			
7.			
8.			
9.			
10.			

■ The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement. Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, sales@envirent.no