


# DIRTY WORK PACK

GEN-1  
ISOLATED HYDRAULIC  
POWERPACK

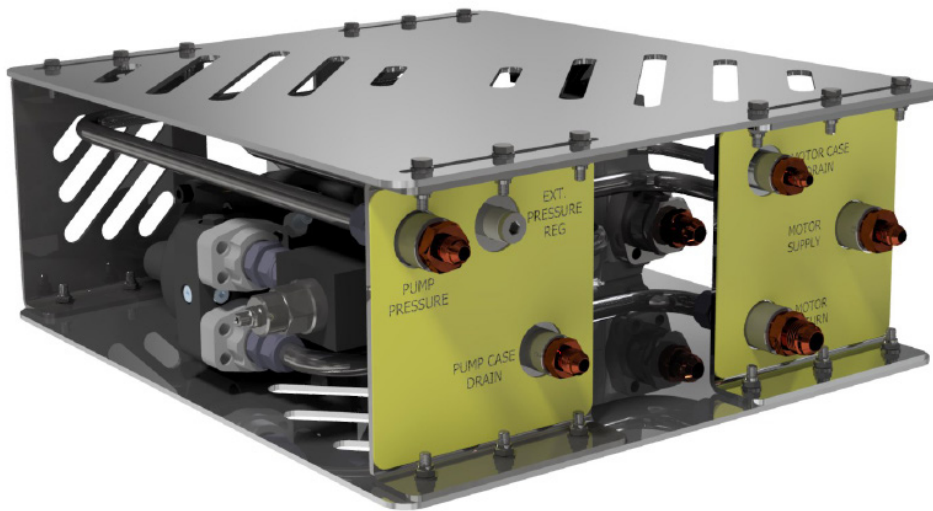

## Description

**This Dirty Work Pack is an Isolated Hydraulic Power Unit (IHPU) that can be easily incorporated into a ROV hydraulic system to provide an isolated hydraulic supply for driving tooling and equipment that may potentially otherwise cause contamination to the main ROV hydraulic supply.**

The unit is a fully self-contained circuit incorporating hydraulic motor, pressure compensated pump, compensated bellhousing, pressure and return line and multiple inlet/outlet connection points. Hook-up to the ROV is quick and simple by connecting a supply, return and drain line to a ROV valve pack function.

Can also be delivered with compensated reservoir and electric/hydraulic operated directional valve as option.

## Features

- 207 / 345 Bar pump supply
- 45 L/min pump flow
- Integrated flow control valve
- Mineral oil or water based fluid
- Rated to 3000 MSW
- Bulkhead connection
- Steel protection cover

■ The specification details are illustrative for marketing purposes only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement.

Envirent AS, Hattelandsveien 92, 4353 Klepp Stasjon, +47 477 77 500 post@envirent.no

# SPECIFICATIONS

## ISOLATED HYDRAULIC POWER UNIT

### General Technical Specifications

Type	Isolated Hydraulic Power Unit
Part Number	103319
Dimensions	mm 550 x 244 x 600
Weight (in air / submerged)	kg ~41 / ~32

### Hydraulic

Max. Input Pressure	Bar 207
Max. Output Pressure	Bar 207 or 345
Max. Input Flow	L/min 90
Max. Output Flow	L/min 45

Fluid Compatibility\*\* Output Mineral oil, Control Fluid and Water based glycol

Connection ROV pressure	JIC #8
Connection ROV return	JIC #12
Connection ROV drain	JIC #6
Connection DWP Supply	JIC #8
Connection DWP Case Drain	JIC #6
Connection DWP Suction	JIC SAE 1-1/4" Flange
Connection DWP Ext. Regulator	JIC #6 (OPTIONAL)

### General Features

Depth rating MSW 3000

\*\* Please contact us for more information regarding fluid compatibility.

