

VALVE PACK MODULAR

ROV TOOLING
REMOTE CONTROL
2-FUNCTION VALVE PACK



Description

Modular Valve Pack system based on intelligent firmware, specially designed to handle different hydraulic control requirements for both simple and complex underwater system and tooling applications.

The 2-function Modular Valve Pack is designed with purpose of being a low cost valve pack, with all features needed to operate subsea tooling. The design is compact and user-friendly "plug and play" of valve modules. The 2-function Valve Pack can easily be increased with additional valve modules as extension to existing setup.

Features

- iCsys Suite Software
- Simple and cost efficient changeout of spares
- Modular Valve Design
- Proportional flow control
- Pressure regulation with feedback
- Working pressure 207 Bar
- Temperature sensor
- Coms. RS 232, 485 and Ethernet
- Light weight and compact design

■ The specification details are illustrative for marketing purposes only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement.

Envirent AS, Hattelandsveien 92, 4353 Klepp Stasjon, +47 477 77 500 post@envirent.no

SPECIFICATIONS

VALVE PACK MODULAR

General Technical Specifications

Type	Valve Pack Modular 2-function
Part Number	111300
Dimensions	mm 390 x 300 x 190
Weight (in air)	kg ~30

Electrical

Supply Voltage	VDC 24VDC
----------------	-----------

Communication

RS 232, RS 485 and Ethernet	8PIN Glen Air G5506-1508-0004 Pigtail 1 meter
-----------------------------	---


Hydraulic

Max. Input Pressure	Bar 207
Max. Output Pressure	Bar 207
Max. Flow NG6 Proportional Valve	L/min 40

Connection ROV pressure	JIC #8
Connection ROV return	JIC #8
Connection output pressure	JIC #6

General Features

Depth rating	MSW 5000
--------------	----------

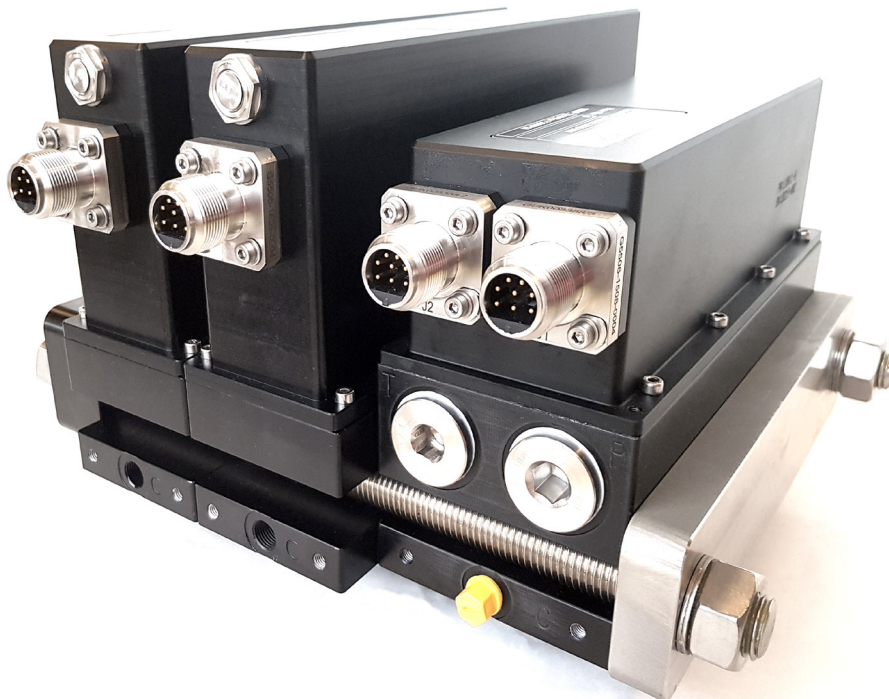

■ The specification details are illustrative for marketing purposes only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement.

Envirent AS, Hattelandsveien 92, 4353 Klepp Stasjon, +47 477 77 500 post@envirent.no