


SUBSEA WINCH 15T 360° SWIVEL

SUCTION ANCHOR
360° SWIVEL PLATE
ROV OPERATED

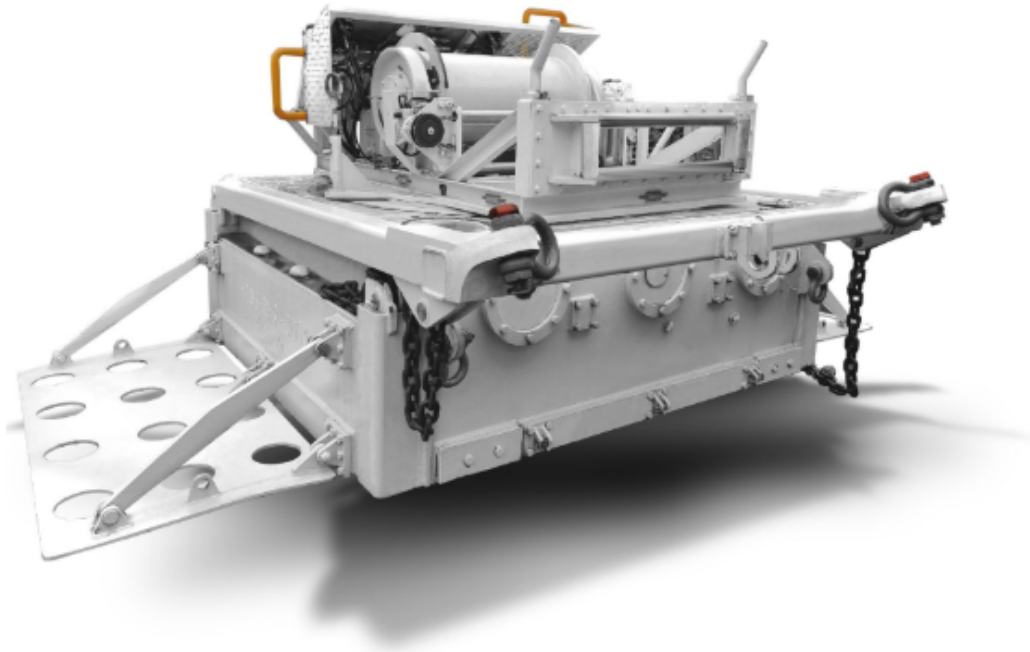

Description

The 15 Ton high quality subsea winch are designed for use during installation, retrieval of riser, flowlines and other relevant subsea operations requiring pull – and realignment support.

The modular 15 Ton Subsea Winch is designed to be used in multipurpose configurations. Switchable between suction anchor systems (suction pump integrated) and mud-math setup.

The winch frame weight act as a clump weight for the equipment to keep it in position in mud-math setup. A Hotstab 3-port connection for hydraulic supply from ROV or HPU.

Typical Operations

- Pulling Operations

Features

- Horizontal pulling force 15 Ton
- Maximum speed 9 meter/min
- Depth rated for 2500 MSW
- Hotstab Ø43 3-port for ROV connection
- Frame act as clump weight
- Available with suction anchor
- 360° subsea swivel plate

SPECIFICATIONS

SUBSEA WINCH 15 TON

General Technical Specifications

Type	Subsea Winch 15 Ton
Part Number	LIFT-WIN
Dimensions L x W x H	4575 mm x 3320 mm x 2230 mm
Weight in air / submerged	~24 700 kg / ~18 500 kg

Hydraulic

Max Input Pressure	207 Bar
Pull Force @ 207 Bar	15 Ton

Max Input Flow	30 L/min
Speed @ 30 L/min	9 M/min

Connection ROV Pressure	Hotstab Ø43 3-port (port 1)
Connection ROV Return	Hotstab Ø43 3-port (port 2)
Connection ROV Drain	Hotstab Ø43 3-port (port 3)

Technical

Depth Rating	MSW 2500
--------------	----------