

WELLHEAD CLEANING TOOL

18-3/4" AX/VX WELLHEAD SEALS
ACID INJECTION
CLEANING TOOL



Description

The Cleaning tool is designed to be used on an 18-3/4" Wellhead with or without tubing hanger installed. Hydraulic supply and control of the Cleaning Tool is by means of and through the ROV system.

Compensated Acid Cleaning Unit can be added on request. This can be quite useful to remove more heavy debris or even adding a corrosion inhibitor while performing cleaning operations. The acid cleaning unit is suitable for supply of multiple citric acids if this is required for the operational purpose.

Typical Operations

- Wellhead Cleaning

Features

- ROV Operated
- Rotary Cleaning Disc
- Scotch Pads
- Acid Injection
- Receptacle for Hydraulic Connection

SPECIFICATIONS

WELLHEAD CLEANING TOOL

General Technical Specifications


Type	Wellhead Cleaning Tool
Part Number	CT-WH-01
Dimensions L x W x H	847 mm x 869 mm x 815 mm
Weight in air / submerged	67 kg / 44 kg
Wellhead Dimension	18-3/4" with or without tubing hanger installed

Hydraulic Specifications

Work Pressure	110 Bar
Max. Pressure	140 Bar
Required Flow	7 L/min

Hydraulic Interface

Connection Hydraulic	Blue Logic Ø35 DP Receptacle
Connection Acid	Blue Logic Ø35 SP Receptacle

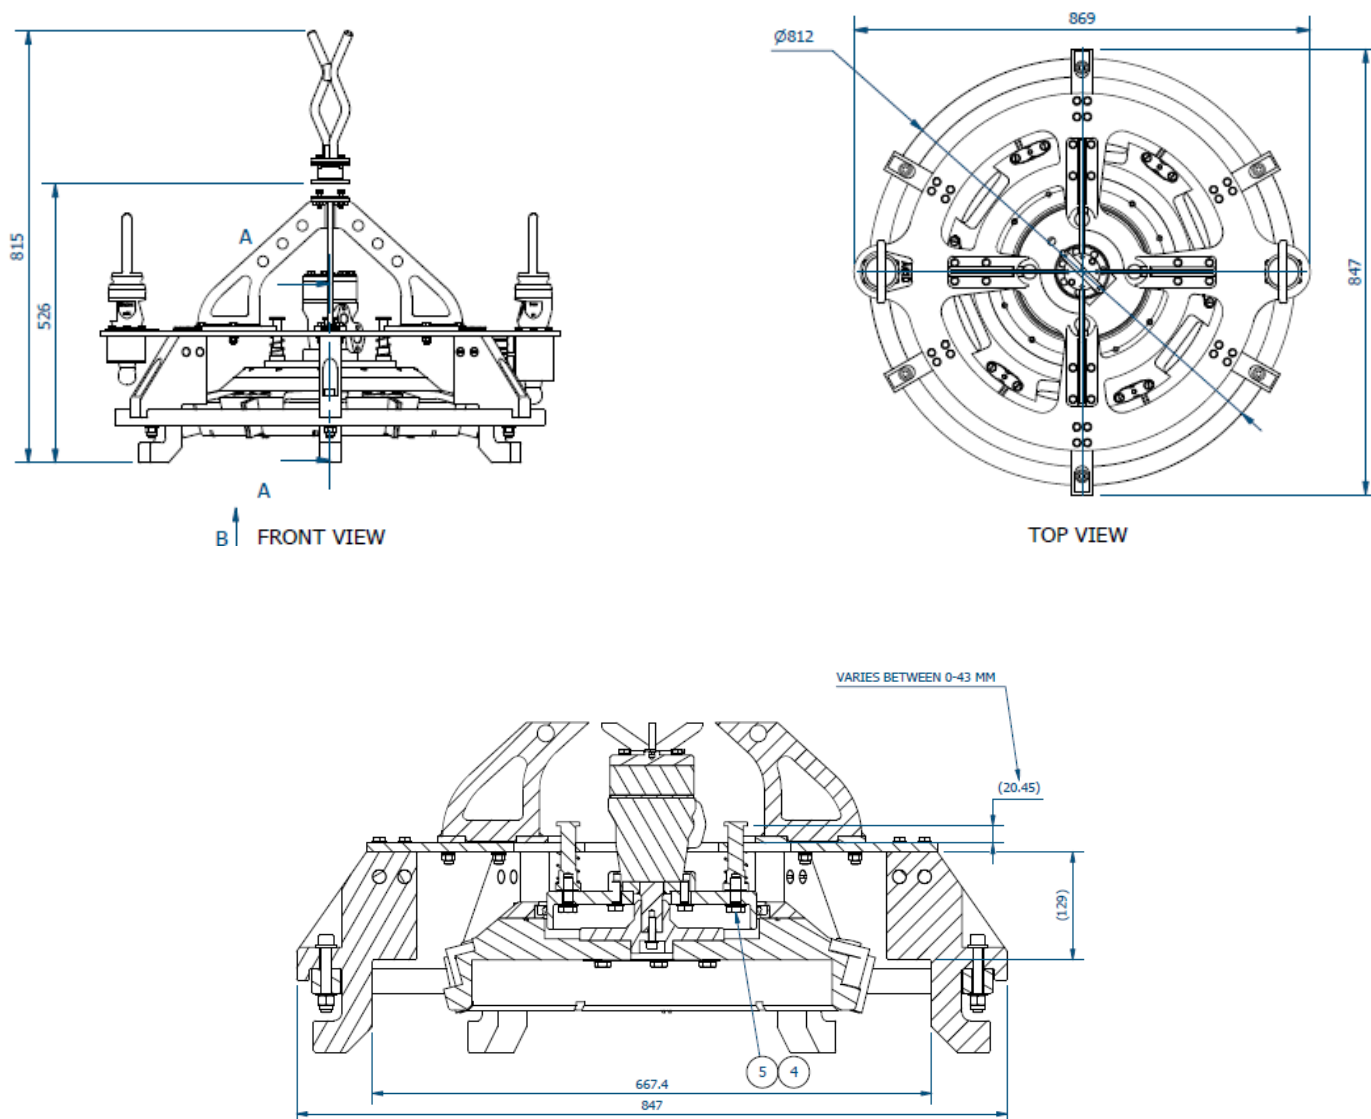

■ The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement. Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, sales@envirent.no