

RUD ROV HOOK 10T

LIFTING AND HANDLING
TWIN TRIGGER 2.0
10T ROV HOOK



Description

RUD ROV Hook 2.0 – an innovative solution for subsea operations. Featuring a patented Twin Trigger locking system and a robust design, this hook provides maximum safety and easy operation with an ROV manipulator arm. Available in 10- and 25-tonne capacities, 100% crack tested and approved for dynamic loading in accordance with EN 1677.

The RUD ROV Hook 2.0 is specifically developed for demanding underwater operations. The unique Twin Trigger locking mechanism requires both triggers to be activated simultaneously, eliminating the risk of accidental opening.

The hook has been tested in real-life operations and offers higher load security than traditional snap hooks. It is 100% crack tested and withstands more than 20,000 load cycles in accordance with EN 1677.

- The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement. Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, sales@envirent.no

Features


- Twin Trigger locking mechanism
- Available in 10T og 25T Safety factor 4:1
- 100% crack tested
- Innovative solution
- Tested according to EN 1677
- A safe, versatile, and robust solution for the subsea industry

SPECIFICATIONS

RUD ROV HOOK 10T

General Technical Specifications

Type	ROV Rud Hook
Part Number	RUD-10T
Weight in air	13,5 kg
WLL	10T

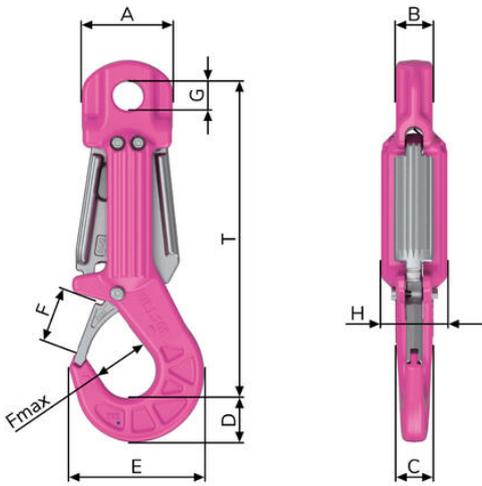

Attribute	Value
WLL	10.000 kg
Weight	13,5 kg
size A	112 mm
size B	45 mm
size C	45 mm
size D	55 mm
size E	166 mm
size F	65 mm
size G	38 mm
size H	82 mm
pitch T	393 mm

■ The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement. Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, sales@envirent.no