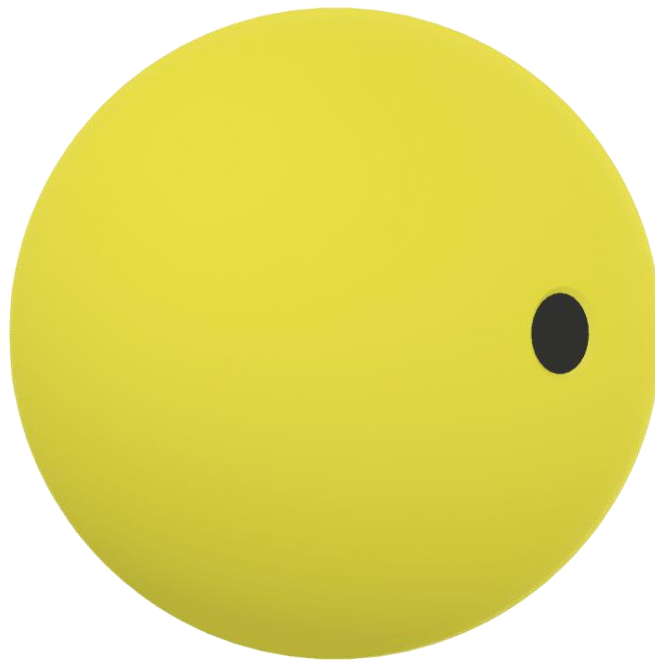


SPHERICAL BUOYS OVUN

BUOYS

VARIOUS SIZE

VARIOUS DEPTH RATING



Description

The Ovun buoyancy sphere is designed for applications where moderate buoyancy is sufficient. Manufactured as a single, solid unit, the spheres are available in sizes up to Ø450 mm and are supplied with a 50 mm through-hole for rope or wire attachment, ensuring easy handling and safe installation. Ideal for marine and industrial applications where reliability and ease of use are essential.

The buoyancy sphere is a reliable and versatile flotation element designed for situations with limited buoyancy requirements. Its one-piece construction provides excellent strength and long service life. For sizes up to Ø450 mm, the spheres are supplied with a 50 mm through-hole, making them well suited for installation using rope or wire. The large centre hole also allows for safe and convenient manual handling. The product is suitable for a wide range of marine, industrial, and technical applications requiring stable flotation performance.









■ The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement.
Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, sales@envirent.no

SPECIFICATIONS

SPHERICAL BUOYS

Document No.: EVT-xxxxx

Revision: 0

Picture	Part. No.	Size (mm)	Length	Color	Buoyancy	Depth Rating	Weighth
	0932309	Ø300		Yellow	7.5 kg	500 mtr	6.0 kg
	0932310	Ø300		Yellow	7.5 kg	800 mtr	6.5 kg
	0932328	Ø340		Yellow	12.0 kg	500 mtr	9.0 kg
	0932349	Ø400		Yellow	19.0 kg	500 mtr	13.0 kg
	0932351	Ø400		Yellow	18.0 kg	800 mtr	14.0 kg
	0932366	Ø450		Yellow	28.0 kg	500 mtr	19.0 kg
	0932370	Ø450		Yellow	27.0 kg	800 mtr	20.0 kg
	0932372	Ø450		Yellow	21.0 kg	1500 mtr	25.0 kg
	0932373	Ø450		Yellow	19.0 kg	2000 mtr	28.0 kg
	0932374	Ø450		Yellow	18.0 kg	2500 mtr	
	0932380	Ø450	710 mm	Yellow	50.0 kg	500 mtr	38.0 kg

■ The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement. Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, sales@envirent.no