

COMPENSATOR SPRING LOADED 30 ML

ENVIREX PRODUCT

30 ML

0,7 BAR



Description

The 30ml compensator design is simple and consist of few parts which prevents potential errors. The compensator parts are machined subsea suitable materials.

The compensator contains a rolling diaphragm which ensures a smooth and linear movement of the piston. The oil level indicator is placed in center on the back end and allows you to easily visually inspect the oil level inside.

Features

- Compact and low weight
- Flexible and reliable
- Wide range of fluid compatibility
- Easy Installation
- Consist of few components
- Different adapters available

SPECIFICATIONS


COMPENSATOR 30 ML SPRING LOADED

Document No.: EVT-13830

Revision: 0

General Technical Specifications

Type	Compensator 30 ml
Part Number	V100217
Dimension L x W	68 mm(116 mm Max L) x Ø60
Body Material	POMC / NBR or Viton
Operating Temperature	-10°C / +60°C
Interface	1" BSP
Compensator Pressure	0,7 Bar
Fluid Compability	Mineral Oil / Water Based Oil / Seawater

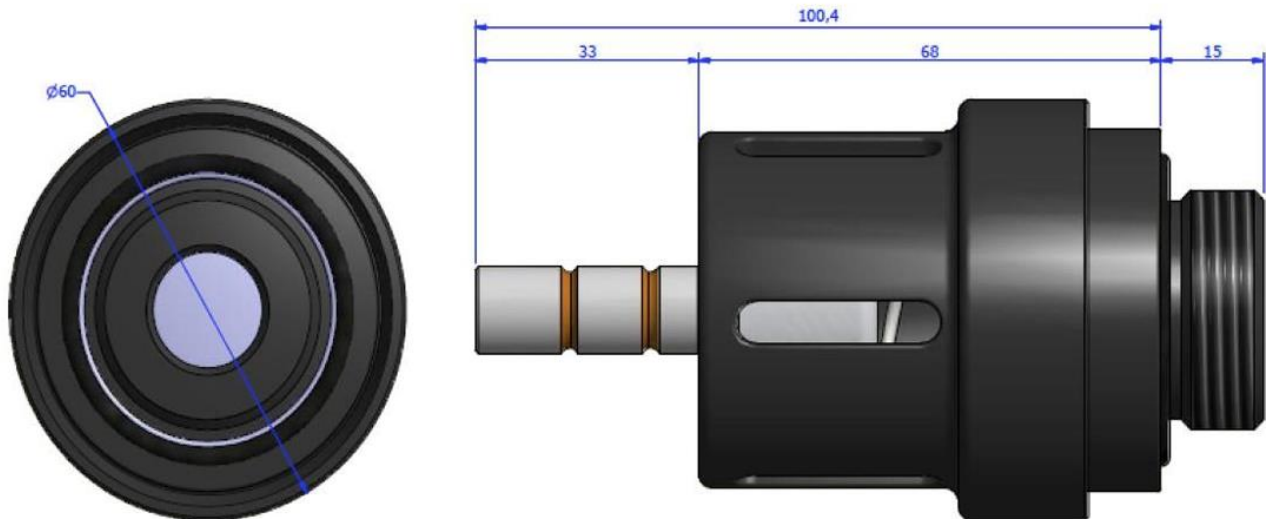

■ The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement. Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, sales@envirent.no