
Ø60 Blue Logic Valve Stabs & Receptacles

Hot Stab with integrated Ball Valves
Ranges from 2-port to 6-port
Leak Free

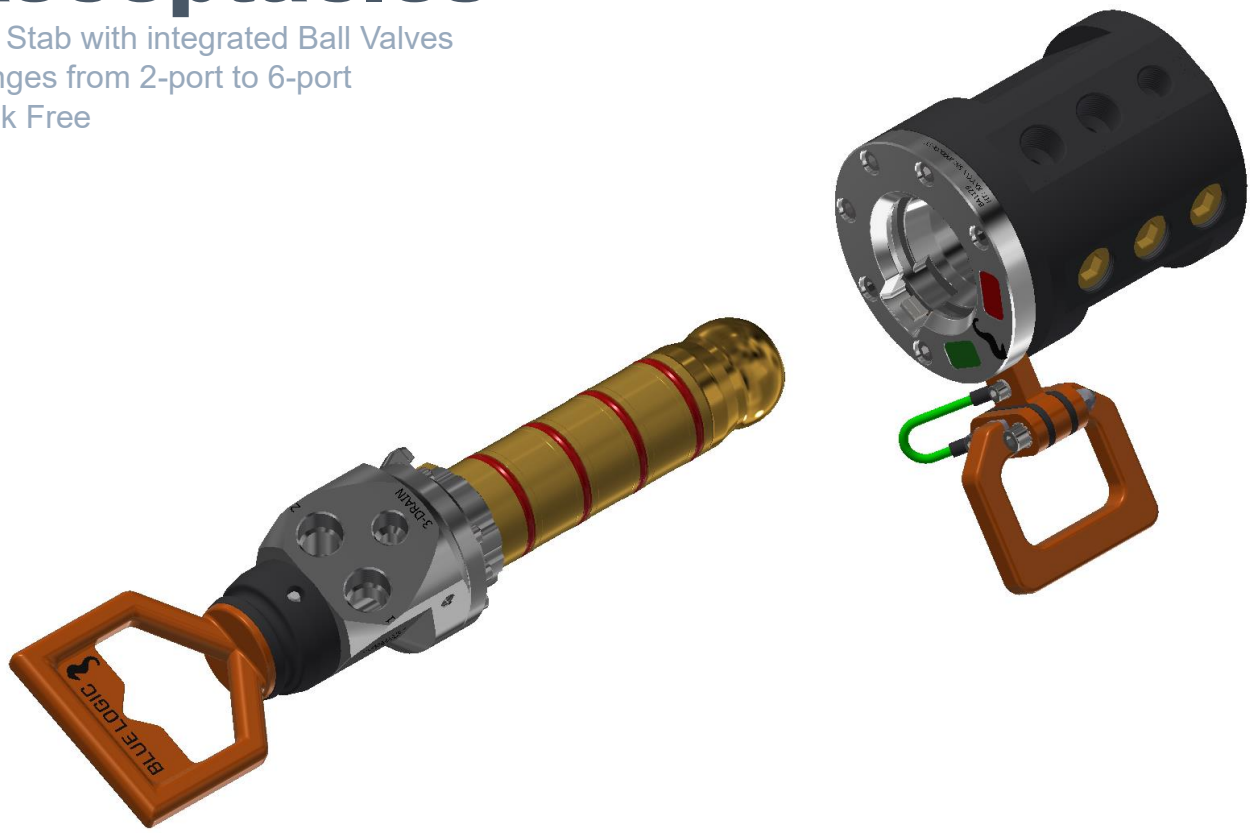

Description

The Ø55 Valve Stab System combines pressure-balanced hot stab technology with integrated ball valves, allowing safe connection and disconnection at full system pressure without fluid spill or water ingress. Available in several configurations with up to three independent hydraulic lines, the system provides a compact and flexible solution for subsea fluid transfer and control.

Envirent maintains a broad selection of Blue Logic equipment in its rental pool. Additional configurations and equipment can normally be sourced on short notice when required.

Features

- Ø60 compact Valve Stab system
- Integrated ball valves in stab and receptacle
- Connect and disconnect at full system pressure
- No fluid spill or water ingress during connection and disconnection
- Full-bore flow path for excellent flow characteristics
- Stab mechanically locked when valves are open
- Safety interlock prevents valve operation unless fully mated
- ROV-friendly operation
- Suitable for a wide range of subsea fluid control applications

The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement.
Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, sales@envirent.no

envirent

SPECIFICATIONS

Blue Logic Ø60 Valve Stabs & Receptacles

Document No.: EVT-14386

Revision: 0

Technical Specifications

Type	Ø60 Valve Stab System
Design Standard	API 6A, ISO 10423, NE-EN13445
Dimensions	2-port and 3-port
Operating Temperature	-4°C to +60°C
Depth Rating	3000 MSW
Fluid Compability	Mineral Based Oil, Synthetic Control Fluids
Max. Working Pressure	From 250 Bar to 345 Bar

Ø60 Valve Stabs:

Ø60 DP 345BAR, BSP 3/4"

PN: BA8490
Ports: 2
Port Size: 3/4" BSP
Max. WP: 345 Bar



Ø60 TP 250BAR, BSP 1/2" & 3/4"

PN: BA1135
Ports: 3
Port Size: 1x 1/2" BSP
2x 3/4" BSP
Max. WP: 250 Bar



Ø60 Receptacle:

Ø60 DP 345BAR, BSP 3/4"

PN: BA1738
Ports: 2
Port Size: 3/4" BSP
Max. WP: 345 Bar



Ø60 TP 250BAR, BSP 1/2" & 3/4"

PN: BA6542
Ports: 3
Port Size: 1x 1/2" BSP
2x 3/4" BSP
Max. WP: 250 Bar



The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement.
Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, sales@envirent.no

envirent

Ø60 TP 250BAR, BSP 1/2" & 3/4" With Mounting Flange

PN:	BC0814
Ports:	3
Port Size:	1x 1/2" BSP 2x 3/4" BSP
Max. WP:	250 Bar



Ø60 Parking, Protection and Pressure Stab:


Ø60 DP Protection

PN:	BB1202
Ports:	2
Function:	Protection



Ø60 TP Protection

PN:	BA1965
Ports:	3
Function:	Protection

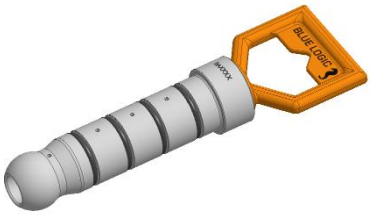

Ø60 DP Parking

PN:	BB6353
Ports:	2
Function:	Parking



Ø60 TP Parking

PN:	BA3054
Ports:	3
Function:	Parking



Ø60 DP Pressure Stab

PN:	BA1972
Ports:	6
Function:	Keep pressure
Max. Pressure:	345 Bar



The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement.
Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, sales@envirent.no


envirent

SPECIFICATIONS

Blue Logic Ø60 Valve Stabs & Receptacles

Ø60 TP Pressure Stab

PN:	BC2973
Ports:	3
Function:	Keep Pressure
Max. Pressure	250 Bar



The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement.
Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, sales@envirent.no

envirent