


DIRTY WORK PACK

210 BAR PUMP
60 LPM FLOW POWERPACK
EFFICIENCY RATED TO 66%

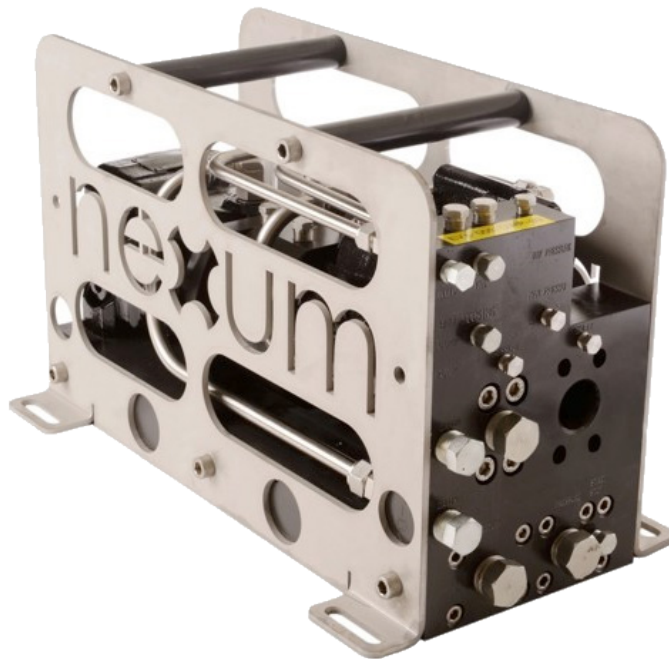

Description

210 Bar Dirty work pack is compact, simple to incorporate and service friendly. Contains well proven components integrated and all hydraulic connections is located in one end.

The motor circuit on the DWP has a built in start/stop valve for remote start/stop, and has a flow regulator valve for speed control. The pump circuit has a built in pressure relief valve. The pump can be internally pressure compensated, remote pressure regulated or connected to a load sensing valve system. Soft-start function integrated to ensure fully utilization at all times.

Features

- ▣ 210 Bar pump supply
- ▣ 60 L/min pump flow
- ▣ Integrated flow control valve
- ▣ Integrated start/stop valve
- ▣ Integrated soft-start function
- ▣ Rated to 3000 MSW
- ▣ Bulkhead connection
- ▣ Efficiency is rated to 66%

SPECIFICATIONS

ISOLATED HYDRAULIC POWER UNIT

General Technical Specifications

Type	Isolated Hydraulic Power Unit
Part Number	DWP-REX
Dimensions	mm 590 x 350 x 250
Weight (in air / submerged)	Kg ~65 / ~55

Hydraulic

Max. Input Pressure	Bar 210
Max. Output Pressure	Bar 210
Max. Input Flow	L/min 90
Max. Output Flow @ 210 Bar	L/min 60

Fluid Compatibility	Pump= Mineral oil / Waterbased Motor= Mineral Oil
---------------------	--

Connection ROV pressure	JIC 08
Connection ROV return	JIC 12
Connection ROV drain	JIC 06
Connection ROV start/stop	JIC 04
Connection DWP supply	JIC 08
Connection DWP Case Drain Connection	JIC 06
DWP Suction	BSP 1-1/4"
Connection DWP Ext. Regulator	NPT 1/8"

Connection DWP Bellhousing Fill	Swagelock QC6 Female
---------------------------------	----------------------

General Features

Depth rating	MSW 3000
--------------	----------

