


# STAB Ø35MM SP-10K INTERV V/CV BSP 3/8"

PRESSURE RATED TO 690 BAR

FIELD PROVEN

WITH CHECK VALVE

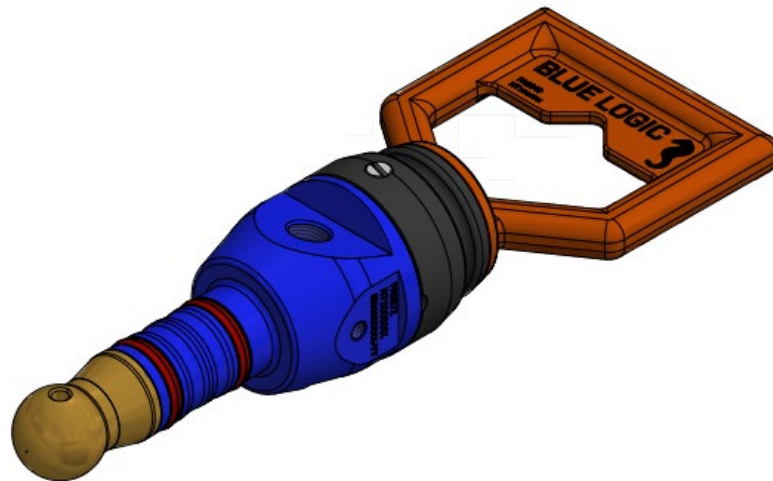

## Description

The Ø35mm Hot Stab is made according to API 17D. This Hot Stab is general designed for flow up to approx. 25 liters pr. minute.

## Typical Operations

- Topside Tooling applications
- Subsea Operations
- Function Testing
- Flushing

## Features

- Field Proven
- Integrated check valves
- Compact Design
- Service & User Friendly
- Massive and robust

# SPECIFICATIONS

Stab Ø35 - SP

## General Technical Specification

Type	Ø35 QP Stab, 10K interv w/check valve BSP 3/8"
ID	6mm
Hydraulic Input	BSP 3/8"
Weight	3 Kg
Dimensions (L x W x H) [mm]	322 x 120 x 120

## Hydraulic Specifications

Pressure Rated	690 bar
Max. Output Flow	25 l/min

