


SUBSEA SAW 60-200 MM

ROV INTERVENTION
CUTTING AND GRINDING
CLAMP ON

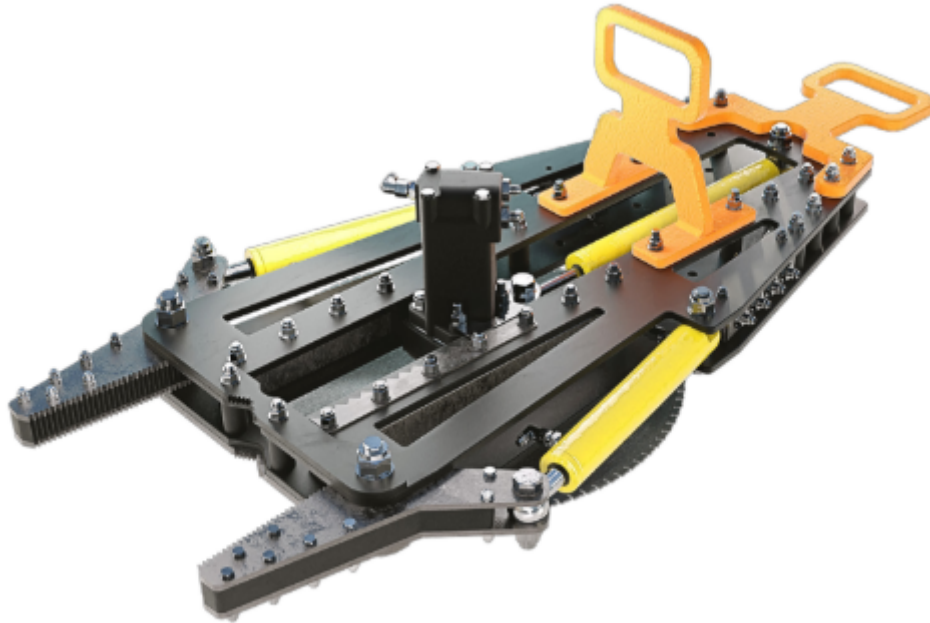

Description

Manipulator held utility saw with long track record.

Subsea saw with a range up to 200 mm.

Within capacity for most work class ROV's.

Track record after years of use in the North Sea. The saw is designed to cut steel pipes, steel profiles and wires.

Standard blades to be supplied with saw are carbide and diamond types.

Claws can be replaced if specific interface is required.

Typical Operations

- Cutting and Grinding Operations
- Cutting of steel pipes, steel profiles and wires

Features

- Maximum cutting 200 mm
- Small footprint
- ROV friendly cutting tool
- Multipurpose use
- Low weight

SPECIFICATIONS

SUBSEA SAW 60-200 MM

General Technical Specifications

Type	Subsea Saw 60-200 mm
Part Number	114221
Dimensions L x W x H	-- mm x -- mm x -- mm
Weight in air / submerged	~101 kg / ~80 kg

Hydraulic

Max Input Pressure	207 Bar
Max Input Flow	76 L/min
Max Rotating Speed	226 RPM

Recommended Feeding Speed	10-15 mm/min
---------------------------	--------------

Connection ROV Pressure A	JIC #6 (hotstab option)
Connection ROV Pressure B	JIC #6 (hotstab option)
Connection ROV Feed / Clamp	JIC #6 (hotstab option)

Technical

Depth Rating	MSW 3000
--------------	----------

